

**NOW
OBSOLETE
07/01/09**

Model KM10 Pressure Transducer



CE
LOOK FOR THIS AGENCY
MARK ON OUR PRODUCTS

APPLICATIONS

The cost effective construction of the KM10 is ideally suited to address the demanding pressure sensing needs of the original equipment manufacturer in a multitude of applications, including:

- Off-Road Equipment
- Construction Machinery
- HVAC/Refrigeration
- Compressor Control
- Pump Monitoring
- Agricultural Implements
- Diagnostic Kits
- Engine Monitoring
- Process Automation & Control
- Hydraulic & Pneumatic Sensing
- Machine Tool

The Ashcroft® KM10 pressure transducer marries a proven polysilicon thin film sensor to a high performance ASIC to provide a highly accurate, stable and durable transducer.

Calibration, by digital compensation, results in an extremely linear and repeatable instrument over a wide temperature range.

The highly stable thin film sensor of 17-4 PH stainless steel is electron beam welded to one of a wide selection of stainless steel pressure fittings to provide superior media compatibility and over-pressure capability.

PERFORMANCE SPECIFICATIONS

Ref. Condition 23°C ±2° (73°F)

Accuracy: Includes non-linearity, hysteresis, non-repeatability, zero offset and span setting errors – Terminal Point method:

±0.5% Span, 100 psig F.S. and above
±1.0% Span, 75 psig F.S. and below

Stability: ±0.25% Span/year

Interchangeability: <0.5% Span

Durability: Tested to 50 million cycles

ENVIRONMENTAL SPECIFICATIONS

Temperature:

Storage	-40/120°C	(-40/250°F)
Operating	-40/120°C	(-40/250°F)
Compensated	-30/120°C	(-25/250°F)

Humidity: 0/100% R.H., no effect

Thermal Coefficients: -30 to 120°C (-25 to +250°F)

Zero	Span
±0.01%/°C (±0.0055%/°F)	±0.01%/°C (±0.0055%/°F)

FUNCTIONAL SPECIFICATIONS

Ranges:

vac/0 psi*	0/15 psi*	0/1000 psi
vac/15 psi*	0/30 psi*	0/1500 psi
vac/30 psi*	0/50 psi*	0/2000 psi
vac/50 psi*	0/75 psi*	0/3000 psi
vac/75 psi*	0/100 psi*	0/5000 psi
vac/100 psi*	0/200 psi*	0/7500 psi
vac/150 psi*	0/300 psi*	
vac/200 psi*	0/500 psi	
vac/300 psi*	0/750 psi	

*Ranges in psig with vented cable or Metri-Pack termination only

Overpressure (F.S.):	Proof	Burst
750 psi & below	2 x range	10 x range
1500 psi	2 x range	5 x range
3000 psi	2 x range	5 x range
5000 psi	1.5 x range	5 x range
7500 psi	1.2 x range	5 x range

Vibration: Random to 1 KHz, 20 g's

Shock: 50 g's, 11 msec

Drop Test: No effect 1 meter drop on concrete

Response Time: Less than 1msec

Position Effect: Less than 0.01% F.S.

ELECTRICAL SPECIFICATIONS

Output Signal Options:

Output	Excitation	Supply Current
0.5-4.5 Vdc (ratiometric)	5 Vdc ± .5 Vdc	10mA typical
1-5 Vdc	8-32 Vdc	10mA typical
1-6 Vdc	10-32 Vdc	10mA typical

Reverse Polarity Protection: Yes

Insulation Breakdown Voltage:

(Circuit to case) 150 Vac/1 min. 500 Vac option

Insulation Resistance: (Circuit to Case)

100M ohm min.@50 Vdc.

Warm-up Time: <25 msec

CE Compliance:

Per EN 61326: 1997 Annex A: 1998 (A1)

PHYSICAL SPECIFICATIONS

Pressure Connection Options: see "To Order" below

Pressure Connection: 304 SS

Housing: 304 SS

Diaphragm Material: 17-4 PH SS

Electrical Termination: see "To Order" below

• Metri Pack 150 Series

• Shielded Cable

• Flying Leads

Protection Rating: IP67

Weight: Approx. 2 oz. (60g)

OPTIONS

Throttle screws

Custom mating harness

Special cleaning (for O₂)

Non-standard pressure ranges

Alternate process connections

Special calibration/accuracy

**NOW
OBSOLETE
07/01/09**


Model KM10 Pressure Transducer

DIMENSIONS

SHIELDED CABLE TERMINATION



(Height may vary slightly depending on process connection)

**Dimensions:
Inches (mm)**

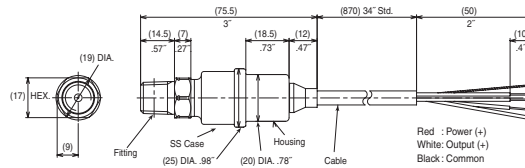

Cable is shielded with aluminum polyester tape and covered with PVC jacket. Operating temperature of -30/105°C, storage temperature -40/120°C. Cable includes drain wire. Vent tube provided in ranges of 300 psi and below. Individual wires are AWG 24 with tinned copper ends. Cable is rated at 300V, and is UL 2517 listed. 3 ft. (.9mm) standard length.


METRI-PACK

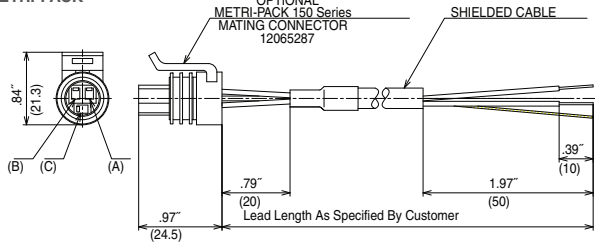

- PIN**
(B) -- Red --- Power(+)
(A) -- Black --- Common
(C) -- White --- OutPut(+)

**Dimensions:
Inches (mm)**

FLYING LEAD STYLE

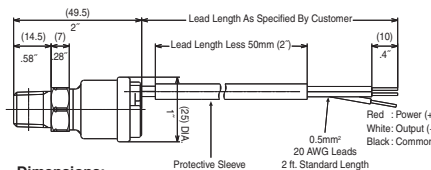

**Dimensions:
Inches (mm)**

How To Order

K	M	1	0					#	X		
Model Type (KM10)	Accuracy Class (5) 0.50% (100 psi & above) (7) 1.0% (75 psi & below)	Pressure Connection (M01) 1/8 NPT-M (M02) 1/4 NPT-M (M38) 3/8-24 UNF-2A (MEK) 7/16-20 UNF-2A (FRW) 7/16-20 UNF-2B (M10) M10 x 1 (M14) M14 x 1.5 (MR3) R 3/8 (MR2) R 1/4 (MG3) G 3/8 (MG2) G 1/4	Output Signal (15) 1-5 Vdc (RM) Ratiometric 0.5-4.5 Vdc (16) 1-6 Vdc	Electrical Termination For Metri-Pack (G0) = no mating conn. (G2) = mating conn. 3' cable (G1) = mating conn. w/customer specified length For Shielded Cable (F2) 36" shielded cable, PVC sheath (P1) Other length (P9) Custom cable For Flying Lead (12) 12 inch length (24) 24 inch length (36) 36 inch length	Pressure Range PSIG Vac./0 Vac./15 Vac./30 Vac./50 Vac./75 Vac./100 Vac./150 Vac./200 Vac./300 0/15 0/30 0/50 0/75 PSIS* 0/100 0/150 0/200 0/300 0/500 0/750 0/1000 0/1500 0/2000 0/3000 0/5000 0/7500 0/75 *Sealed sensor	Special Features (XTS) Throttle (X6B) Oxygen cleaning					