


Thermowells Threaded Configuration

Tapered Shank

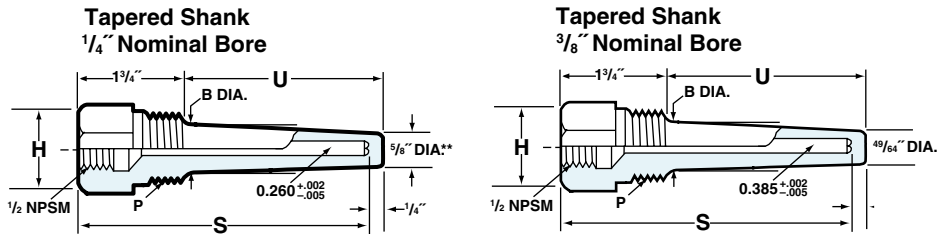

Legend: U = Shank length under threads P = Process connection NPT S = Bore depth = instrument element length including threads
 B = Shank base diameter H = Hex size across flats

P	H	B*
1/2"	1.125"	.62"
3/4"	1.125"	.87"
1"	1.375"	1.06"

*Stepped shank only, RT

Dimensions (inches)			Part Number	
S	U	P**	1/4" Bore (.260)	3/8" Bore (.385)
4	2 1/2	1/2	50W0250HT260	N.A.*
		3/4	75W0250HT260	75W0250HT385
		1	10W0250HT260	10W0250HT385
6	4 1/2	1/2	50W0450HT260	N.A.*
		3/4	75W0450HT260	75W0450HT385
		1	10W0450HT260	10W0450HT385
9	7 1/2	1/2	50W0750HT260	N.A.*
		3/4	75W0750HT260	75W0750HT385
		1	10W0750HT260	10W0750HT385
12	10 1/2	1/2	50W1050HT260	N.A.*
		3/4	75W1050HT260	75W1050HT385
		1	10W1050HT260	10W1050HT385
15	13 1/2	1/2	50W1350HT260	N.A.*
		3/4	75W1350HT260	75W1350HT385
		1	10W1350HT260	10W1350HT385
18	16 1/2	1/2	50W1650HT260	N.A.*
		3/4	75W1650HT260	75W1650HT385
		1	10W1650HT260	10W1650HT385
24	22 1/2	1/2	50W2250HT260	N.A.*
		3/4	75W2250HT260	75W2250HT385
		1	10W2250HT260	10W2250HT385

*Not available

**For 1/2" process, tip diameter is 1/2"