


## Block and Bleed 2-Valve Manifold - V01 Series

### FEATURES

- Isolates and bleeds process from instrument assembly
- 316L Stainless steel construction
- Externally adjustable gland
- Reinforced gland body protection
- Blowout protection
- Non-rotating needle provides bubble tight shut-off

### TYPICAL USES

- Oil & gas industry
- Chemical industry
- Power plants

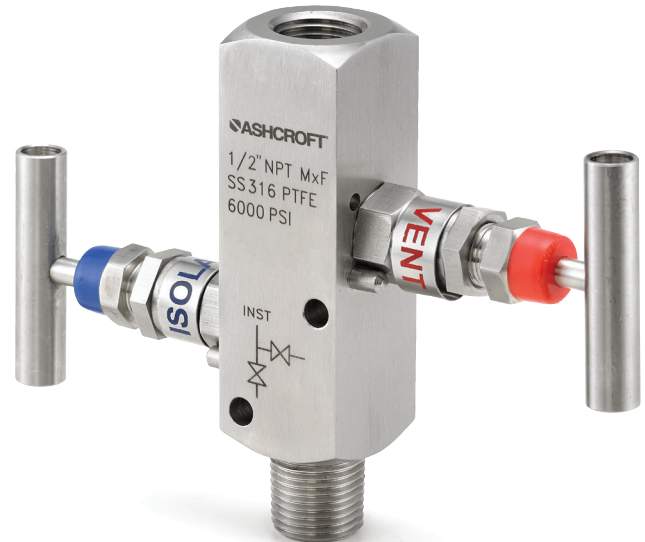

V01 Series  
2-Valve Manifold

### SPECIFICATIONS

Process Conn:	1/2 NPTM, 1/2 NPTF
Instrument Conn:	1/2 NPTF
Construction:	316L Stainless steel
Max Pressure	
Rating:	6000 psi (414 bar) at 100 °F (38 °C)

- PTFE Packing
- Dust cap protects internals from contaminants
- 1/4 NPT Vent port with pipe plug

### COMPONENTS

### MATERIAL

#### Wetted

Body	316L Stainless steel
Gland body	316L Stainless steel
Needle	316L Stainless steel
Washer	316L Stainless steel
Gland seal	PTFE
Plug 1/4 NPT (M)	316L Stainless steel

#### Non-Wetted

Gland retainer	316 Stainless steel
Check nut	316 Stainless steel
Handle	316 Stainless steel
Lock pin	316 Stainless steel
Valve bonnet	316 Stainless steel
Dust cap	P.V.C.

# Data Sheet

## Block and Bleed 2-Valve Manifold - V01 Series

### ORDERING CODE

Example:	04	V01	2VA	SS	50	XP7
<b>Process Connection</b>						
04 - ½ NPT Male	04					
50 - ½ NPT Female						
<b>Series Code</b>						
V01 - Valve		V01				
<b>Version</b>						
2VA - Valve style A			2VA			
<b>Material</b>						
SS - 316 Stainless steel				SS		
<b>Instrument Connection</b>						
50 - ½ NPT Female					50	
<b>Options</b>						
HY - Hydrostatic testing						
NH - Stainless steel tag						
P7 - Compliance with power piping ASME B31.1						XP7

### DIMENSIONS in [ ] are millimeters

For reference only, consult Ashcroft for specific dimensional drawings

