

1005 Commercial Pressure Gauge

Features

- PowerFlex™ movement provides superior resistance to shock, vibration and pulsation
- TrueZero™ reduces reading errors by using “zero-box” instead of conventional pins
- FlutterGuard™ (option) reduces movement wear and pointer flutter
- Customized dial printing
- Heat resistant push-in polycarbonate window

Typical Uses

- Pumps and compressors
- Filter regulators
- Fluid power equipments
- Medical equipment
- Pool and spa filters
- Hydraulics and pneumatics
- OEM equipment
- Beverage dispensing equipment
- Industrial machinery



1005
1½", 2", 2½", 3½" dial size



Specifications

Accuracy:	±3-2-3% of span (ASME B40.100 Grade B)
Dial Sizes:	1½", 2", 2½", 3½"
Ranges:	1½": Vacuum to 1,000 psi 2", 2½", 3½": Vacuum, compound to 6,000 psi
Process Connection Location:	Lower, center back
Process Connection Size:	⅜ and ¼ NPT Male
Dial:	Black figures on white background, aluminum
Pointer:	Black, aluminum, adjustable, min/max assembly
Movement:	PowerFlex™ with polyester segment
Dampening options:	FlutterGuard™
Approvals:	UL 404, High pressure compressed gas (2", 1,000-4,000 psi) UL 252A, Compressed gas regulator accessories (2", 30-300 psi)

Wetted Components

Bourdon Tube	Process Connection	Restrictor
Bronze	Brass	0.013" orifice restrictor in gauges 1,000 psi and above

Non-Wetted Components

Case	Window
Black painted steel	Polycarbonate

Key Benefits

- Customizable for new applications
- Easy readability
- Long lasting

Min/Max Temperature Limits

Version	Ambient	Process	Storage
Dry	-40 °F to 150 °F (-40 °C to 65 °C)	-40 °F to 150 °F (-40 °C to 65 °C)	-40 °F to 150 °F (-40 °C to 65 °C)

Contact Us

1.800.328.8258
 ashcroft.com

All specifications are subject to change without notice. All sales subject to standard terms and conditions. Ashcroft®, FlutterGuard™, PowerFlex™, TrueZero™, and Trust the Shield® are trademarks of Ashcroft Inc. The following non-Ashcroft trademarks are the property of their respective owners: Teflon™.
 ©2026 Ashcroft Inc. 1005_gauge_ds_RevG_27-May-26

1005 Commercial Pressure Gauge

Ordering Code	Example:	20	W	1005H	02	L	XAP	400#
Dial Size								
15 - 1½"								
20 - 2"		20						
25 - 2½"								
35 - 3½"								
Movement type								
W - PowerFlex™			W					
Model								
1005H - black painted steel/brass process connection material				1005H				
Process Connection Size								
01 - ⅛ NPT Male								
02 - ¼ NPT Male (not available on 1½" gauge)					02			
KJ - ¼ straight BSPT; PT ¼ JIS (not available on 1½" gauge)								
KA - ¼ tapered BSPT; PT ¼ JIS (not available on 1½" gauge)								
KG - ⅛ BSPT; R ⅛								
13 - G ¼ B (not available on 1½" gauge)								
77 - G ⅛ no spigot								
Process Connection Location								
L - Lower						L		
B - Center back								
T - Top								
E - Left side								
D - Right side								
Options - Minimums apply for optional features(If choosing an options(s) must include "X")								X__
Dampening								
NZ or NZ7F - Silicone Free FlutterGuard(Includes throttle plug)								
SF - FlutterGuard™ (includes 0.013" orifice throttle plug)								
T4 - 0.007" orifice restrictor								
T5 - 0.013" orifice restrictor(0.013" orifice restrictor standard in ranges 1,000-6,000 psi)								
T7 - 0.020" orifice restrictor								
T9 - 0.063" orifice restrictor								
7F - FlutterGuard™ logo (can only be used in conjunction with XSF/XNZ – FlutterGuard™)								
Socket								
NP - Nickel plated socket								
Case/Ring								
VH - Vent hole in case								
YZ - Chrome Plated Case								
Windows/Pointers								
AP - Adjustable pointer							AP	
EP - Min/max pointer								
RL - Lexan® window/black friction ring								
RG - Glass window/black friction ring								
13 - Glass window/chrome friction ring								
14 - Lexan window/chrome friction ring								

1005 Commercial Pressure Gauge

Ordering Code (continued)	Example:	20	W	1005H	02	L	XAP	400#
Bourdon Tube System Assemblies								
PR - Receiver gauge dial code; 12#-ALK (0-100 linear); 12#-ALL (0/100%); 12#APR (0-10sq. root)								
Marking/Tagging								
M1 - Dial marking "Supply"								
M2 - Dial Marking "Output"								
M3 - Dial marking "Instrument"								
T6 - Dial Marking "Transmit"								
Packaging/Labeling								
ZO - Bulk pack								
ZP - Customer part number on carton/plain white label								
ZQ - Customer part number printed directly on carton								
Testing/Certificates								
RS - RoHS compliant								
RU - UL252A listed. (only available in ranges, 30-300 psi)								
UL - UL404 listed. (only available in ranges 1,000-4,000 psi)								
Ranges (coding example see range table on page 3 for all standard ranges)								
Single Scale								
400# - 400 psi								400#

Note: Black protective boot (must be ordered separately - not part of product code)

471B181-01	(1.5")
471B181-02	(2")
471B181-03	(2.5")
471B181-04	(3")

1005 Commercial Pressure Gauge

TABLE 2


Model	1005							
Dial Size	1½"	2"	2"	2½"	2½"	3½"	3½"	3½"
Case	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel
Conn. Size	⅛	⅛	¼	⅛	¼	⅛	⅛	¼
Conn. Type	Lower/ Back	Lower/ Back	Lower/ Back	Lower/ Back	Lower/ Back	Lower	Back	Lower/ Back

psi	CODE	bar	CODE	AVAILABILITY				
30IMV/0	VAC	-1/0	VAC-ABE	•	•	•	•	•
30IMV/15	15#&VAC	-1/0/1.5	15/V-AAA		•	•	•	•
30IMV/30	30#&VAC				•	•	•	•
30IMV/60	60#&VAC	-1/0/3	60/V-AAU		•	•	•	•
30IMV/100	100#&VAC	-1/0/5	100/V-AAW		•	•	•	•
30IMV/160	160#&VAC		160/V-AAY		•	•	•	•
30IMV/300	300#&VAC		300/V-ABB		•	•	•	•
0/15	15#	0/1	15#-AAA	•	•	•	•	•
		0/1.6	20#-AAB	•	•	•	•	•
0/30	30#	0/2.5	30#-AAD	•	•	•	•	•
0/60	60#	0/4	60#-AAF	•	•	•	•	•
0/100	100#	0/6	100#-AAG	•	•	•	•	•
		0/7	100#-AAH	•	•	•	•	•
0/160	160#	0/10	160#-AAI	•	•	•	•	•
0/200	200#	0/16	200#-AAL	•	•	•	•	•
0/300	300#			•	•	•	•	•
0/400	400#	0/25	300#-AAN	•	•	•	•	•
0/600	600#	0/40	600#-AAP	•	•	•	•	•
0/1000	1000#	0/60	1000#-AMK	•	•	•	•	•
0/1500	1500#	0/100	1500#-AMM		•	•		
0/2000	2000#	0/160	2000#-AMO		•	•		•
0/3000	3000#				•	•		•
0/4000	4000#	0/250	4000#-AMQ		•	•		•
0/5000	5000#				•	•		•
0/6000	6000#	0/400	6000#-AUE		•	•		•
kPa	CODE	kg/cm	CODE	AVAILABILITY				
-100/0	VAC-AGF	76cmHG/0	VAC-ADP	•	•	•	•	•
		76cmHG/0/1	15/V-ADB		•	•	•	•
-100/0/150	30/V-AFT	76cmHG/0/2	30/V-ADD		•	•	•	•
-100/0/300	60/V-AFV	76cmHG/0/3	60/V-BEI		•	•	•	•
		76cmHG/0/4	60/V-ALQ		•	•	•	•
-100/0/500	100/V-AFX	76cmHG/0/6	100/V-BEJ		•	•	•	•
-100/0/900	160/V-AFZ	76cmHG/0/6	160/V-ADI		•	•	•	•
		76cmHG/0/20	300/V-BEL		•	•	•	•
0/100	15#-AFB	0/1	15#-ACK	•	•	•	•	•
0/160	20#-AFC			•	•	•	•	•
0/200	30#-AFD	0/2	30#-ACM	•	•	•	•	•
0/250	30#-AFE	0/3	45#-ACO	•	•	•	•	•
0/400	60#-AFG	0/4	60#-ACP	•	•	•	•	•
0/600	100#-AFH	0/6	100#-ACQ	•	•	•	•	•
0/800	120#-BAT			•	•	•	•	•
0/1000	160#-AFJ	0/10	160#-ACS	•	•	•	•	•
0/1600	200#-AFM	0/15	200#-BEA	•	•	•	•	•
		0/20	300#-BEB	•	•	•	•	•
0/2500	400#-AFO	0/25	400#-ACX	•	•	•	•	•
0/4000	600#-AFQ	0/35	600#-BEC	•	•	•	•	•
		0/40	600#-ACZ	•	•	•	•	•
		0/50	600#-BED	•	•	•	•	•
0/6000	1000#-BAU	0/70	1000#-ANB	•	•	•	•	•
0/8000	1000#-BAV			•	•	•	•	•
0/10,000	1500#-ATK	0/100	1500#-ANC		•	•		
0/16,000	2000#-BAW	0/150	2000#-BEE		•	•		•
0/25,000	4000#-BAX	0/250	4000#-ANG		•	•		•
		0/350	5000#-BEF		•	•		•
0/40,000	6000#-ATU	0/500	6000#-BEG		•	•		•

1005 Commercial Pressure Gauge

Dimensions

For reference only, consult Ashcroft for specific dimensional drawings

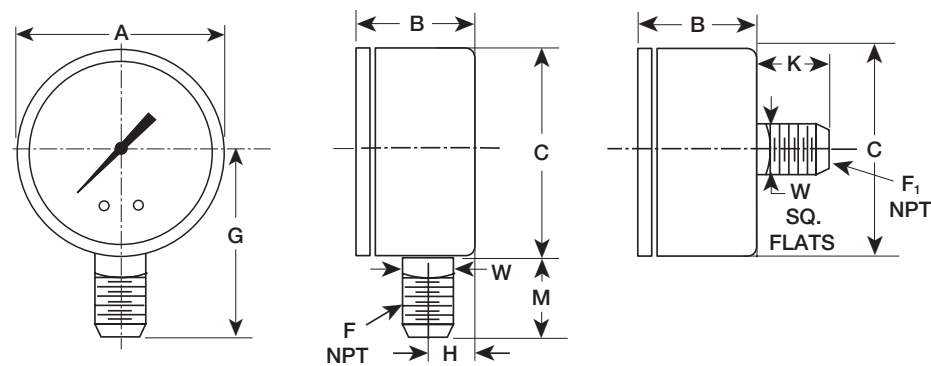

Dial Size inches (mm)	A	B		C	F NPT	F ₁ NPT	G	H	K	M	W		Weight oz / kg	
		Lower	Back								Dry	Wet	Dry	Wet
1¼"	1.62 [42]	0.86 [22]	0.99 [25]	1.6 [41]	⅛	⅛	1.46 [37]	0.28 [7]	0.67 [17]	0.66 [17]	0.56 [14]	0.44 [11]	2.05 oz 0.058 kg	1.98 oz 0.056 kg
2"	2.09 [53]	1.04 [26]	1.04 [26]	2.05 [52]	⅛ or ¼	⅛ or ¼	1.85 [47]	0.34 [9]	0.88 [22]	0.82 [21]	0.56 [14]	0.56 [14]	3.10 oz 0.088 kg	3.67 oz 0.104 kg
2½"	2.73 [69]	1.10 [28]	1.07 [27]	2.68 [68]	⅛ or ¼	⅛ or ¼	2.18 [55]	0.36 [9]	0.88 [22]	0.84 [21]	0.56 [14]	0.56 [14]	4.52 oz 0.128 kg	4.09 oz 0.116 kg
3½"	3.67 [93]	1.21 [31]	1.21 [31]	3.61 [92]	⅛ or ¼	⅛ or ¼	2.72 [69]	0.43 [11]	0.88 [22]	0.92 [23]	0.56 [14]	0.56 [14]	6.56 oz 0.186 kg	5.57 oz 0.158 kg