

GC52 Differential Pressure Transmitter

Features

- Bright backlit 4-digit LCD display
- Scaling function allows display to indicate user defined physical units
- Internal “push-button” configurability allows quick range changes
- “Loop Check” function allows unit to output 4-20 mA without applying pressure
- Linear flow output and totalization via square root extraction

Typical Uses

- Pressurized & non-pressurized tank levels
- Flow measurement (liquid/gas)
- Pollution monitoring equipment

Performance Specifications

Reference Temperature:	73 °F (23 °C)
Accuracy:	±0.50% of span (URL) Includes the effects of linearity, hysteresis, and repeatability
Stability:	±0.25% of span (URL)/year
Output Resolution:	0.1% of span (URL)
Model:	4 digit, 10 mm LCD with LED backlight

Environmental Specifications

Temperature Effects:	(-10 °C to 60 °C) ±0.03% FS/C°
Temperature Limits:	Storage: 5 °F to 150 °F (-15 °C to 65 °C) Operating: 14 °F to 140 °F (-10 °C to 60 °C) Compensated: 14 °F to 140 °F (-10 °C to 60 °C)

Functional Specifications

Static (Line) Pressure

Pressure Range:	Proof:	Burst:
4 IWC to ≤400 IWC	300 psi	800 psi

Single Side (Differential)

Pressure Range:	Proof:	Burst:
≤8 IWC, ±4 IWC	30 psid	130 psid
≥20 IWC, ±8 IWC	100 psid	130 psid

Static (Line) Pressure Effects

Pressure Range:	Effect:
≥20 IWC, ±8 IWC	±0.3% Range/100 psi (URL)
8 IWC, ±4 IWC	±0.7% Range/100 psi (URL)
4 IWC	±1.5% Range/100 psi (URL)

Response Time:	100 ms (user adjustable)
----------------	--------------------------

Vibration:	5 g's 150 Hz
------------	--------------

Shock Effect:	10 g's 16 ms
---------------	--------------



GC52
Pressure Transmitter



Key Benefits

- Up to 8X smaller than a conventional process transmitter
- Compact, robust design
- Easily rotatable display, 90° increments
- Robust NEMA 4 (IP66) aluminum die cast housing

Electrical Specifications

Output Signal:	4-20 mA (2 Wire)
Supply Voltage:	12-32 Vdc
Rangeability/Adjustment:	Zero -10% to 110% Span Span -10% to 110% Span (Accuracy and output resolution based upon full scale (URL) value)
Insulation Resistance:	50 Vdc (>100 MΩ)
EMC Compliance:	EMC Directive 2004/108/EC IEC/EN 61326-1: 2006 (EMI Class A/ EMS Table 2) IEC/EN 61326-2-3: 2006 ((Annex BB (Pressure Transducer))
Circuit Protection:	Reverse polarity and miswire protected

Contact Us


1.800.328.8258
ashcroft.com

All specifications are subject to change without notice. All sales subject to standard terms and conditions. Ashcroft® and Trust the Shield® are trademarks of Ashcroft Inc. The following non-Ashcroft trademarks are the property of their respective owners: Viton™. For more information, see [Ashcroft Brands & Trademarks](#)
©2025 Ashcroft Inc. GC-52_transmitter_ds_RevD_10-29-25

GC52 Differential Pressure Transmitter

Physical Specifications		
Weight:	Approx. 1.0 lb.	
Environmental Rating:	IP66/NEMA 4	
Mounting:	Mounting bracket included	
Pressure Connection:	¼ NPT Female	
Electrical Connection (External):	½ NPT Female Conduit Cable Gland (Cable diameters 0.35" to 0.47")	
Wetted Components		
Diaphragm	Process Connection	Media Compatibility
316 SS, Viton™ & Alumina Ceramic	316 SS	Fluids and gases compatible with 316 SS, Viton™ and Alumina Ceramic
Non-Wetted Components		
Enclosure		
Aluminum, epoxy coated		


Optional Features	
Calibration Report:	9 point traceable calibration certificate
Pressure Connection:	54 mm conversion joint for 3-way manifold
Load Limitations 4-20 mA Output Only	

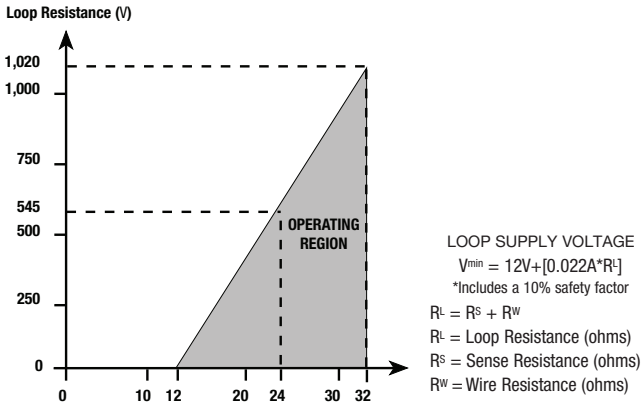


Ordering Code	Example:	GC52	7	F02	42	CG	4IWL	- XRH
Model		GC52						
GC52 - Rangeable wet/wet differential pressure transmitter								
Accuracy			7					
7 - ±0.50% of span								
Pressure Fitting				F02				
F02 - ¼ NPT Female								
Output Signal					42			
42 - 4-20 mA Output signal								
Electrical Connection						CG		
CG - Cable gland								
CD - ½ NPT Female conduit								
Pressure Range								
Bidirectional								
4IWL - ±4 IWC							4IWL	
8IWL - ±8 IWC								
20IWL - ±20 IWC								
40IWL - ±40 IWC								
80IWL - ±80 IWC								
200IWL - ±200 IWC								
Differential								
4IW - 0-4 IWD								
8IW - 0-8 IWD								
20IW - 0-20 IWD								
40IW - 0-40 IWD								
80IW - 0-80 IWD								
200IW - 0-200 IWD								
400IW - 0-400 IWD								
Option (if including an option(s) must include an "X")								X__
RH - 9 pt. Traceable calibration certificate								RH

GC52 Differential Pressure Transmitter

Dimensions

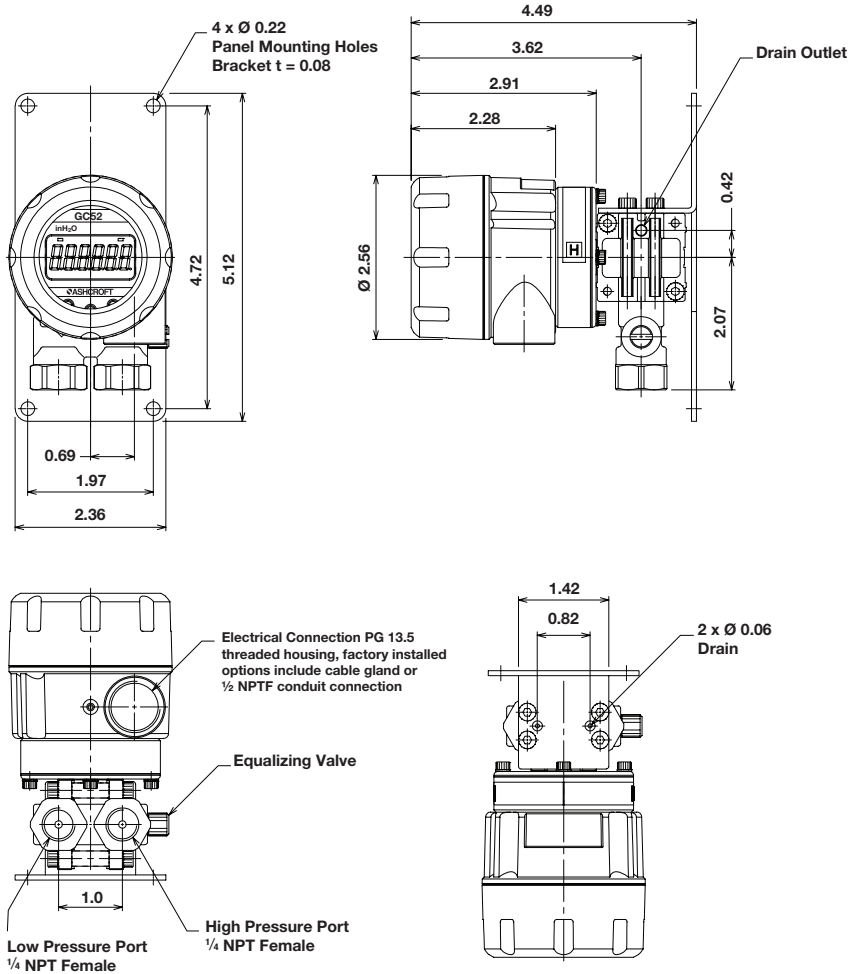

54mm Conversion Joint Body Part Number 141A444-01

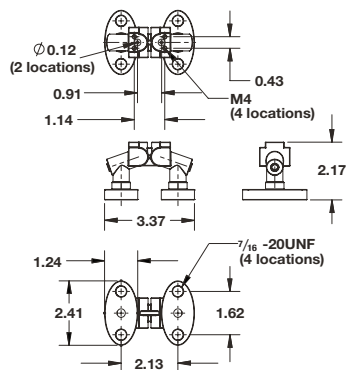

Contact Us

1.800.328.8258

ashcroft.com

All specifications are subject to change without notice. All sales subject to standard terms and conditions. Ashcroft® and Trust the Shield® are trademarks of Ashcroft Inc. The following non-Ashcroft trademarks are the property of their respective owners: Viton™. For more information, see [Ashcroft Brands & Trademarks](#)
 ©2025 Ashcroft Inc. GC-52_transmitter_ds_RevD_10-29-25