

## Data Sheet

# K8 Pressure Transducer

### FEATURES

- Superior long-term stability and repeatability
- All stainless steel wetted parts
- Pressure ranges from 45 psi to 20,000 psi

### TYPICAL USES

- Hydraulic
- Hand / machine tools
- Compressor
- HVAC
- Medical
- Control valves
- Construction equipment
- General purpose industrial process and OEM applications



K8 Pressure Transducer



### PERFORMANCE SPECIFICATIONS

Reference Temperature:	68°F (20°C)
Accuracy Class (% Span):	±0.5%, ±1.00% of span Terminal Point Method: Includes non-linearity, hysteresis, non-repeatability, zero offset and span setting errors
Best Fit Straight Line (BFSL):	±0.25%, ±0.40% of span
Durability:	<10 million cycles
Stability:	±0.5% span/year
Interchangeability:	±0.5%, ±1.0%

### ENVIRONMENTAL SPECIFICATIONS

Temperature Limits:	Storage: -65°F to 250°F (-54°C to 121°C)
	Operating: -20°F to 180°F (-28°C to 82°C)
	Compensated: -20°F to 160°F (-28°C to 71°C)

Thermal Coefficients: (ref. 68°F (20°C))	<b>Accuracy:</b>	<b>0.5%</b>	<b>1%</b>
	ZERO	±0.028%	±0.04%
	SPAN	±0.028%	±0.04%

Humidity Effects: No performance effect at 95% relative humidity-noncondensing

### FUNCTIONAL SPECIFICATIONS

Response Time:	<5ms	
Pressure Ranges:	Vacuum to 20,000 psi	
Shock Effect:	<±0.05% F.S. effect for 100g's, 20ms shock in any axis	
Vibration Effect:	<±0.1% F.S. effect for 0-2,000Hz at 20g's in any axis	
Position Effect:	<±0.01% F.S.	
Overpressure:	Proof: Burst:	
≤2,000 psi	2 X Range	8 X Range
≥3,000 to ≤5,000 psi	1.5 X Range	3 X Range
≥7,500 to ≤20,000 psi	1.2 X Range	1.5 X Range

### KEY BENEFITS

- Miniature size and light weight
- Superior long-term stability and repeatability
- Offered with millivolt output

### ELECTRICAL SPECIFICATIONS

Circuit Protection:	Reverse polarity and miss-wire protected
Insulation Resistance (Circuit Case):	100 MΩ @ 100 Vdc
Output (Sensitivity):	6-18mv/V F.S. depending upon pressure ranges
Excitation:	3-10 Vdc, regulated
Supply Current:	1.4 mA, nominal
Zero Offset:	±3mv/Vdc
Bridge Resistance:	3.5 Ω, nominal

# Data Sheet

## K8 Pressure Transducer

PHYSICAL SPECIFICATIONS	
Environmental Rating:	NEMA 4X
Weight:	1 oz. (approx. without process connection or cable)
Cable:	4" polyethylene coated, 30 AWG or UL approved 36", shielded, vented cable (24 AWG)
Process Connection:	1/8 NPT Male or Female 1/4 NPT Male or Female 1/4 SAE-J-514 Male 1/4 AMINCO Female (pressures over 10,000 psi)

WETTED MATERIAL	
Diaphragm	Process Connection
17-4PH SS	304 SS
NON-WETTED	
Case Material	
304 SS	

ORDERING CODE	Example:	K8	7	M01	MV	F2	100#
<b>Model</b>							
K8 - Pressure Sensor		K8					
<b>Accuracy/Tem. Effects</b>							
7 - 1.00%/±0.040%/ °F			7				
5 - 0.50%/±0.028%/ °F							
3 - 0.50%/±0.014%/ °F							
<b>Pressure Connection Size</b>							
M01 - 1/8 NPT Male				M01			
M02 - 1/4 NPT Male							
F02 - 1/4 NPT Female							
M04 - 1/2 NPT Male							
MEK - 7/16-20 SAE Male							
F09 - 9/16-18 (1/4) Female Aminco®							
<b>Output Signal</b>							
MV - mV/V					MV		
<b>Electrical Termination</b>							
F2 - 3' shielded cable Integral Cable (Pigtail)						F2	
F1 - 4" leads							
<b>Standard Pressure Ranges</b>							
45# - 45 psi							
60# - 60 psi							
100# - 100 psi							100#
150# - 150 psi							
200# - 200 psi							
300# - 300 psi							
500# - 500 psi							
750# - 750 psi							
1000# - 1,000 psi							
2000# - 2,000 psi							
3000# - 3,000 psi							
5000# - 5,000 psi							
7500# - 7,500 psi							
10000# - 10,000 psi							
15000# - 15,000 psi							
20000# - 20,000 psi							


# Data Sheet

## K8 Pressure Transducer


**DIMENSIONS** in [ ] are millimeters

For reference only, consult Ashcroft for specific dimensional drawings

### F2 Electrical Termination

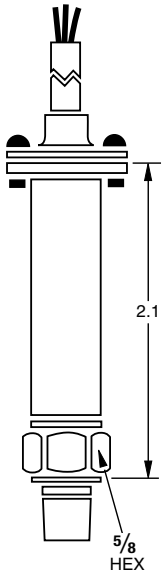

### F1 Electrical Termination with Pressure Connector



### F1 Electrical Termination without Pressure Connector

