# **Data Sheet**



# HPT Pressure Gauge 63 mm Dial Size

### **FEATURES**

- PTFE/PFA wetted parts
- Cleaned in class 10,000 clean room
- Polyethylene-sealed after nitrogen gas flushing

### **TYPICAL USES**

- Chemical delivery system
- Wafer manufacturing
- Ultrapure water applications
- Plating processing
- Pharmaceutical

SPECIFICATIONS	
Accuracy:	±1.5% of span (ranges 90 psi and above) ±2.0% of span (ranges 90 psi and below)
Dial Sizes:	63 mm
Ranges:	Vacuum to 145 psi
Process Connection:	G ¾" R ¾" Tube Stub: ¼", ¾", ½", 6 mm, & 8 mm
Process Conn. Location:	Lower, center back
Window Material:	PET resin
Dial:	White face
Pointer	Black, aluminum
Approvals:	RoHS
Weight:	Aprox. 190 g

WETTED COMPONENTS				
Bellows Material	Socket			
PFA (Perfluoroalkoxy)	PTFE			
NON-WETTED COMPONENTS				
Case				
Polypropylene				



## **KEY BENEFITS**


- Ultraclean design & packaging
- 100% N2 Leak Tested
- Serialized dial (7 digit)

MIN/MAX TEMPERATURE LIMITS			
Process			
10 °F to 85 °F			
(10 °C to 30 °C)			


# **Data Sheet**




# HPT Pressure Gauge 63 mm Dial Size

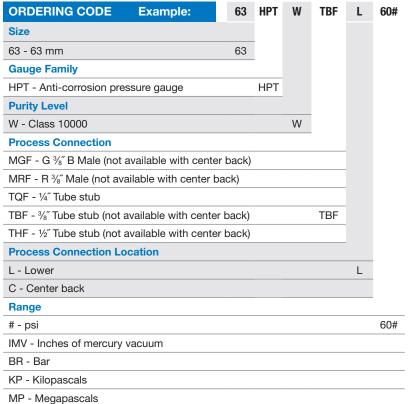

STANDARD RANGES				
psi	bar	kPa	MPa	
30IMV	N1BR	N100KP	NP1MP	
15#	1BR	100KP	P1MP	
30#	2BR	200KP	P2MP	
60#	4BR	400KP	P4MP	
90#	6BR	600KP	P6MP	
150#	10BR	1000KP	1MP	

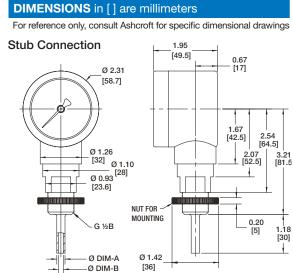

#### **Threaded Connection**

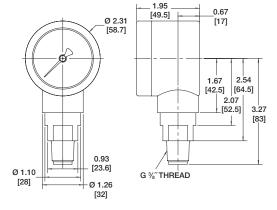

### **Center Back Connection**

