


This drawing includes confidential information which is the property of ASHCROFT INC. This copy is loaned for a specific purpose, with the understanding that it will not be reproduced or used for any other purpose or disclosed to others, and it will be returned on demand.

ASHCROFT® INC.

250 EAST MAIN STREET
STRATFORD, CT 06614

****THIS DIM. APPLIES TO CAT. Nos 1112B & 1112S ONLY**

50-1112M -2 1/8 ±1/8
50-1112 B & S -1 15/16 ±1/8

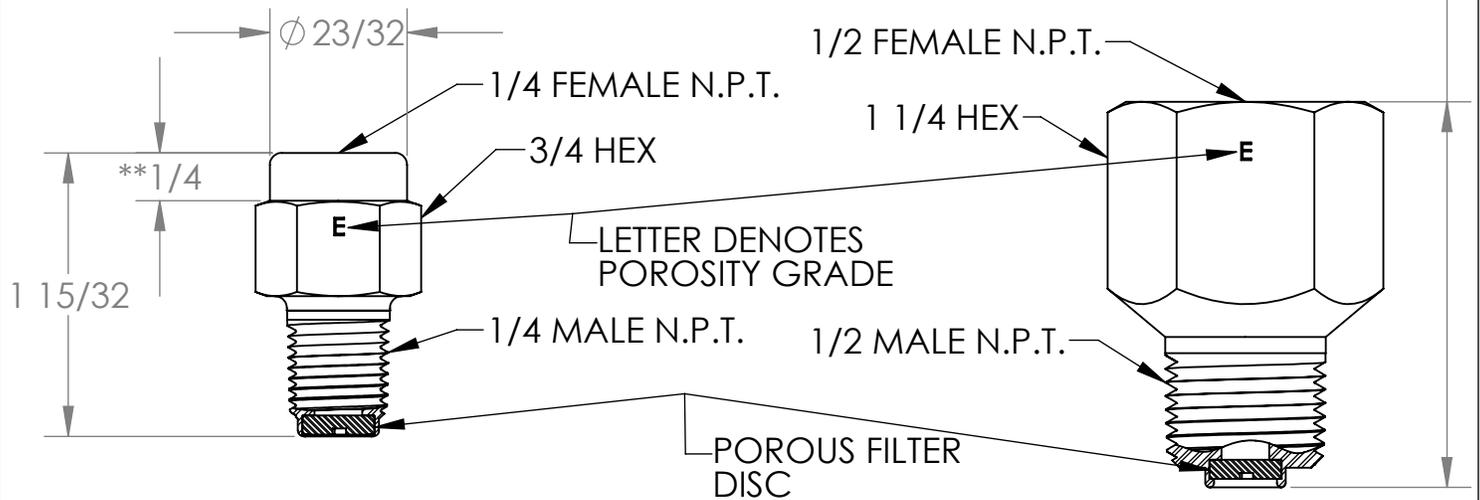

CAT NO.	MATERIAL		MAX. PSI RATING	
	HOUSING	FILTER DISC	1/4 NPT (25)	1/4 NPT (50)
1112B	BRASS QQ-B-626 COMP.-22	ST. STL. TYPE 316	10,000	10,000
1112S	ST. STL. TYPE 303 QQ-S-736B	ST. STL. TYPE 316	15,000	15,000
1112M	R MONEL MIL-SPEC. QQ-N-281A	MONEL	15,000	15,000

POROSITY DESIGNATION	PORE OPENING		CAP. CFH AT "1" PSI DIFF. PRESS.	FOR USE WITH
	MEAN	MAX.		
D	.0025	.005	6.5	OIL OVER 50 CENTISTOKES (0.5 M2/S)
E	.0013	.0025	3.0	WATER & LIGHT OILS 50 CENTISTOKES (0.5 M2/S) & UNDER
G	.0004	.0009	1.1	AIR, STEAM & GASES
HX	.0002	.0006	0.4	MERCURY TYPE INSTR.

B	0009252	REDRAWN SOLIDWORKS	RFF	3/22/2017
A	0083	ADDED NOTE "THIS DIM APPLIES TO CAT.Nos 1112B & 1112S"	-	9/4/1985
-	-	REDRAWN.	RIKI	9/11/1979
REV.	ECO	DESCRIPTION	BY	DATE

This print certified correct for		General Dimensions			
Customer's Name		TYPE 25-1112 (1/4 N.P.T) & 50-1112 (1/2 N.P.T) PRESSURE SNUBBERS			
Customer's Order No.		Drawn	Date	Date of Issue	
Ashcroft Order No.		FLEISCHER	3/22/2017	SHEET-1	Rev.
Certified by	Date			70A1065	B